

Capa magnética combinada con la capa adhesiva para una fijación aún más estable

### DISPOSITIVO ANTI-RAYONES Y ANTI-DESLIZANTE

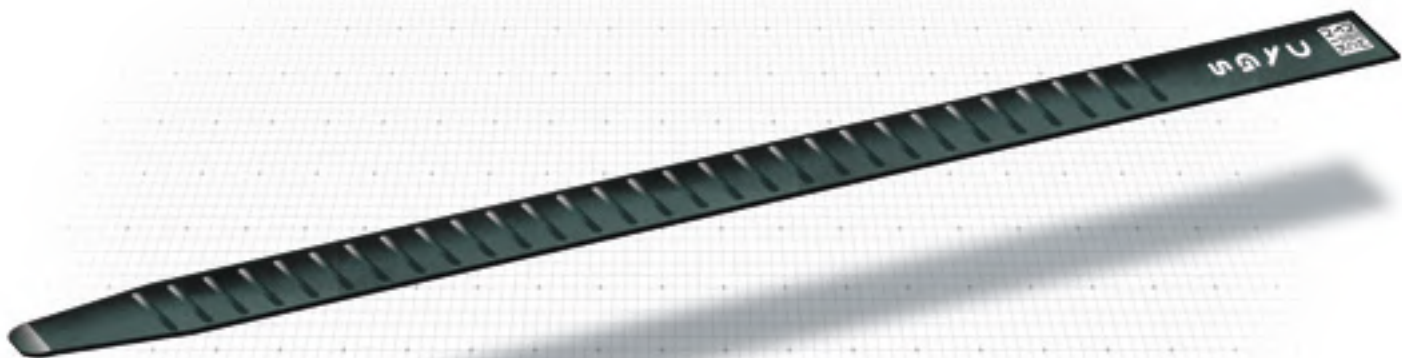


TABLA CON LAS MEDIDAS DE TODOS LOS MODELOS DE REVESTIMIENTOS INFERIORES PARA HORQUILLAS DAGS HG

Anchura	78	80	98	118	148	178	N-P
Longitud <b>1200 x 750</b>	3.3001.50.00		3.3006.50.00				<b>N-P</b>
Longitud <b>1400 x 960</b>	3.3003.50.00	<b>B2</b> 3.3002.50.00	3.3007.50.00	3.3011.50.00	3.3017.50.00	3.3023.50.00	<b>N-P</b>
Longitud <b>1550 x 1150</b>	3.3004.50.00		3.3008.50.00	3.3012.50.00	3.3018.50.00	3.3024.50.00	<b>N-P</b>
Longitud <b>1550 x 1350</b>	3.3005.50.00		3.3009.50.00	3.3013.50.00	3.3019.50.00	3.3025.50.00	<b>N</b>
Longitud <b>2000 x 1650</b>			3.3028.50.00	3.3014.50.00	3.3020.50.00	3.3026.50.00	<b>N</b>
Longitud <b>2500 x 2150</b>			3.3010.50.00	3.3015.50.00	3.3021.50.00	3.3027.50.00	<b>N</b>
<b>COMPOSIT</b> <b>1500 x 1150</b>							
<b>COMPOSIT</b> <b>2500 x 2150</b>				3.3016.50.00	3.3022.50.00		<b>N</b>

dimensiones expresadas en mm **B2:** n°2 Bending **N:** Nervaturas **P:** Plaqueta **Composit:** compuesta por 2 piezas



NEWTECNİK srl  
Via 1° Maggio, 345 - 47842 San Giovanni In Marignano (RN) - ITALY  
T +39 0541 956374 - M +39 392 9050388  
info@newtechnik.it - [newtechnik.it](http://newtechnik.it)

## FICHA TÉCNICA